




Academia Collection Grade A



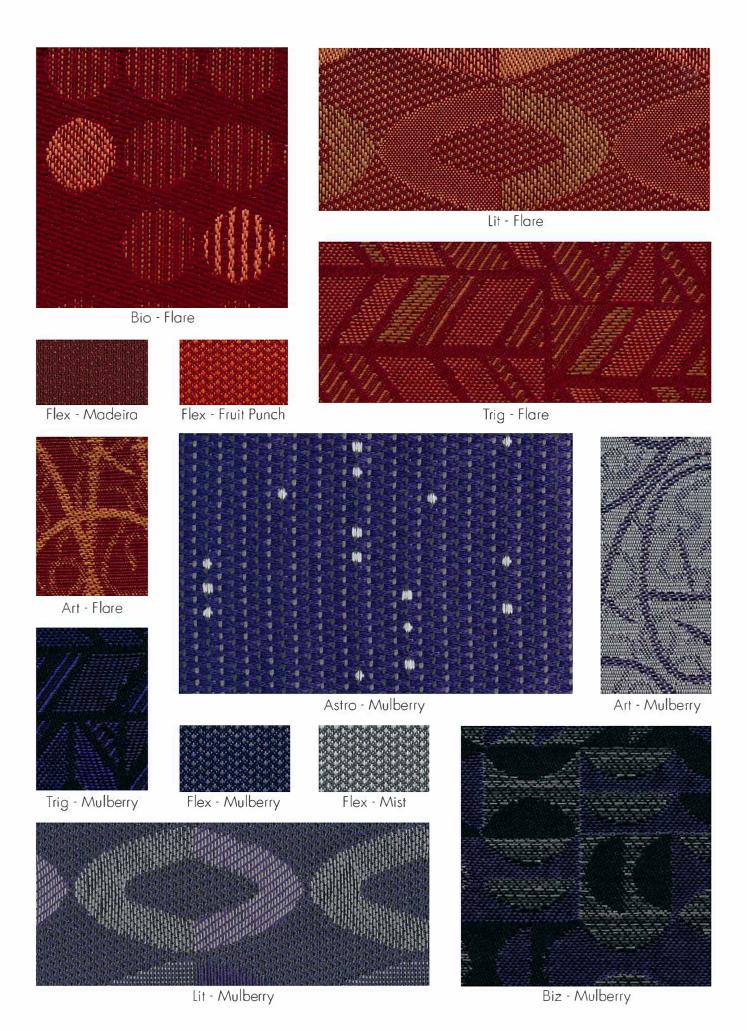

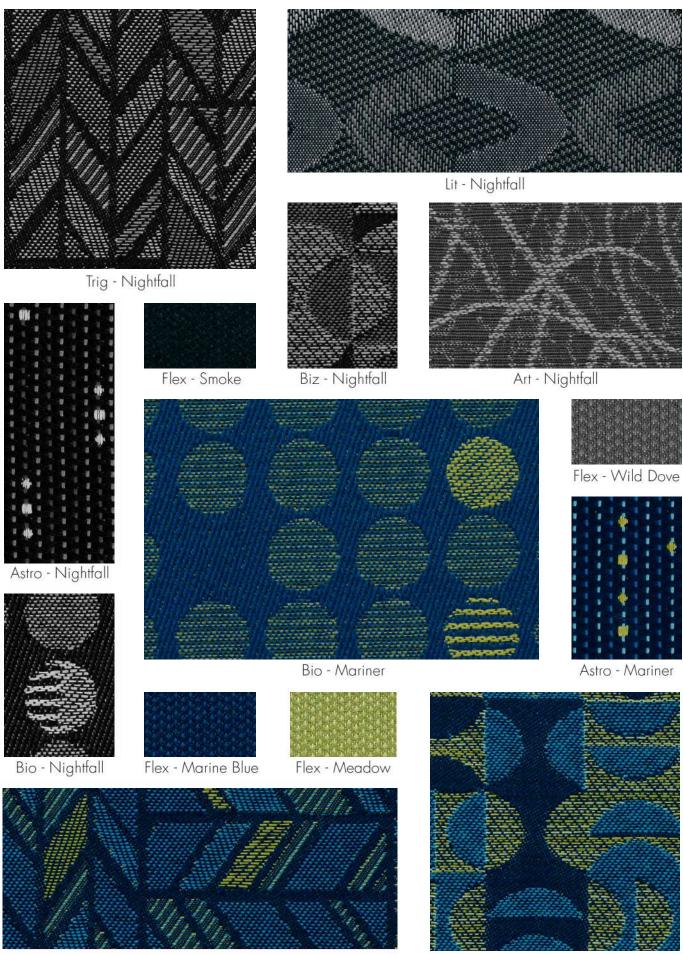


Trig - Mariner Biz - Mariner

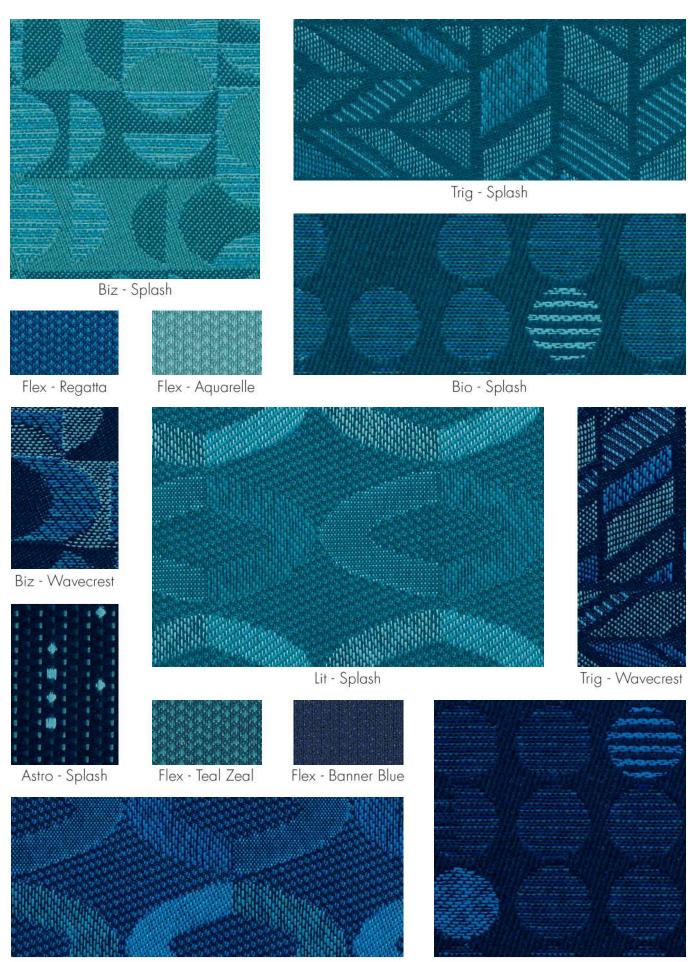

Lit - Wavecrest Bio - Wavecrest



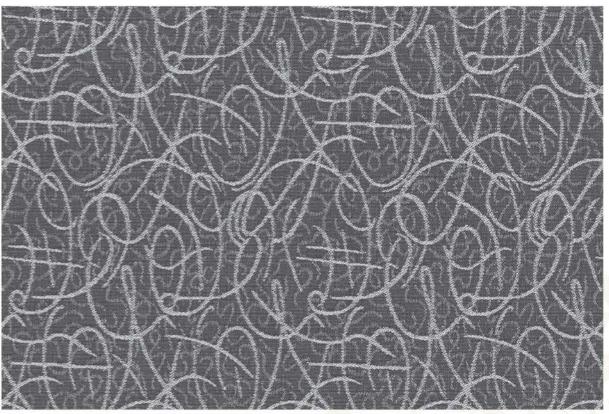

ART: Repeat 6.75" Horizontal x 6.25" Vertical



TRIG: Repeat 9.5" Horizontal x 8.375" Vertical

### **Technical Information**

Width - Pattern	Fabric Content & Backing	Finish	Abrasion (double rubs)	Seam Slippage	Lightfastness	Approx. Repeats	Cleaning Code*
54" ART	100% Polyester Acrylic Backing	Soil & Stain Resistant	75,000	Warp - 63 Weft - 91	60 Hours	6.75" H x 6.25" V	WS
54" ASTRO	100% Polyester Acrylic Backing	Soil & Stain Resistant	75,000	Warp - 69 Weft - 74	60 Hours	6.875" H x 6.125" V	WS
54" BIO	100% Polyester Acrylic Backing	Soil & Stain Resistant	75,000	Warp - 75 Weft - 88	60 Hours	9.0" H x 9.0" V	WS
54" BIZ	100% Polyester Acrylic Backing	Soil & Stain Resistant	80,000	Warp - 73 Weft - 81	60 Hours	7.125" H x 4.625" V	WS
54" FLEX	100% Polyester Acrylic Backing	Soil & Stain Resistant	100,000	Warp - 92 Weft - 91	60 Hours	[None]	WS
54" LIT	100% Polyester Acrylic Backing	Soil & Stain Resistant	75,000	Warp - 81 Weft - 63	60 Hours	2.69" H x 2.5" V	WS
54" TRIG	100% Polyester Acrylic Backing	Soil & Stain Resistant	75,000	Warp - 79 Weft - 60	60 Hours	9.5" H x 8.375" V	WS



#### **Flammability**

Flammability testing determines a fabric's resistance to burning. These fabrics are Cal 117-2013 compliant.



#### Abrasion

The ability of a fabric to withstand damage from wear and rubbing. Passes Heavy Duty Contract ASTM D 4157 modified (No. 10 cotton duck); Wyzenbeek Method.



### **Colorfastness to Light**

The degree to which fabric will retain its color when exposed to light. Passes AATCC 16E, Class 4 minimum at 40 hours.

Note: Class 4 minimum at 60 hours is recommended for direct sunlight exposure.



## **Colorfastness to Wet and Dry Crocking**

The rubbing off of color from fabric onto clothing, hands or other materials and can occur under wet or dry conditions. Passes AATCC 8 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum.



# **Seam Slippage**

The pulling apart of fabric at the seams.

Passes ASTM D 4034 25 lbs. minimum, warp and weft.

\* Cleaning Code WS - For water based stains, use mild detergent foam or upholstery shampoo. For oil based stains, spot clean with a dry cleaning solvent, being sure to test area first. We recommend using a professional cleaning service.





Savoy Contract Furniture • 300 Howard Street • Montoursville, PA 17754
Toll Free 800.233.8953 • www.savoyfurniture.com • sales@savoyfurniture.com