




Elements Collection
Grade A





Elements Collection

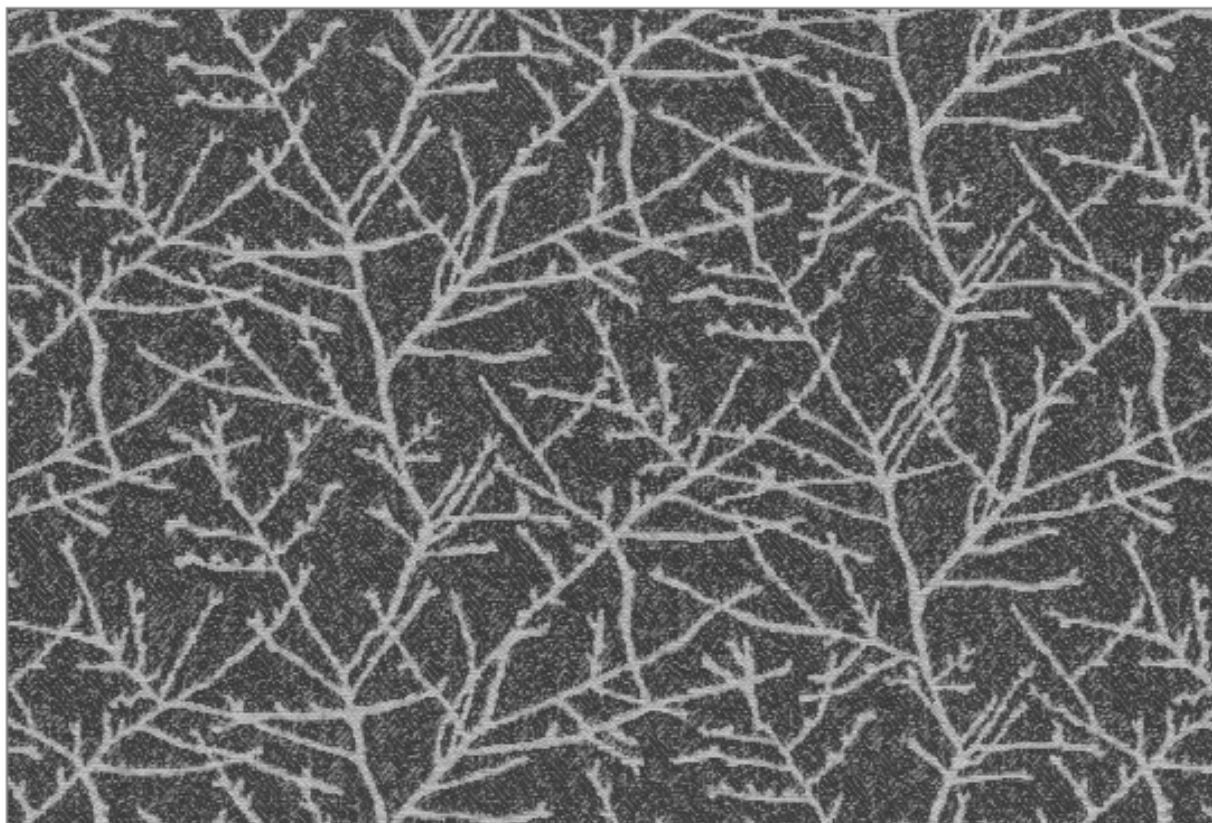


FOREST: Repeat 13.5" Horizontal x 6.687" Vertical






Forest - Smoke

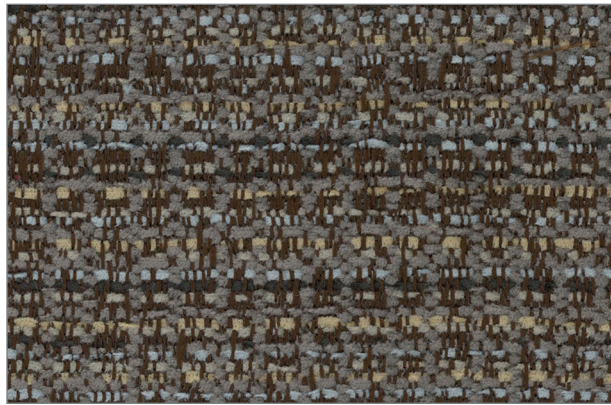


Nook - Pebble

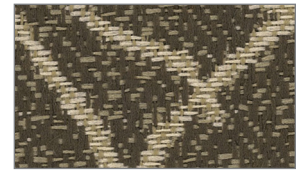


Forest - Pebble



Flex - Pebble

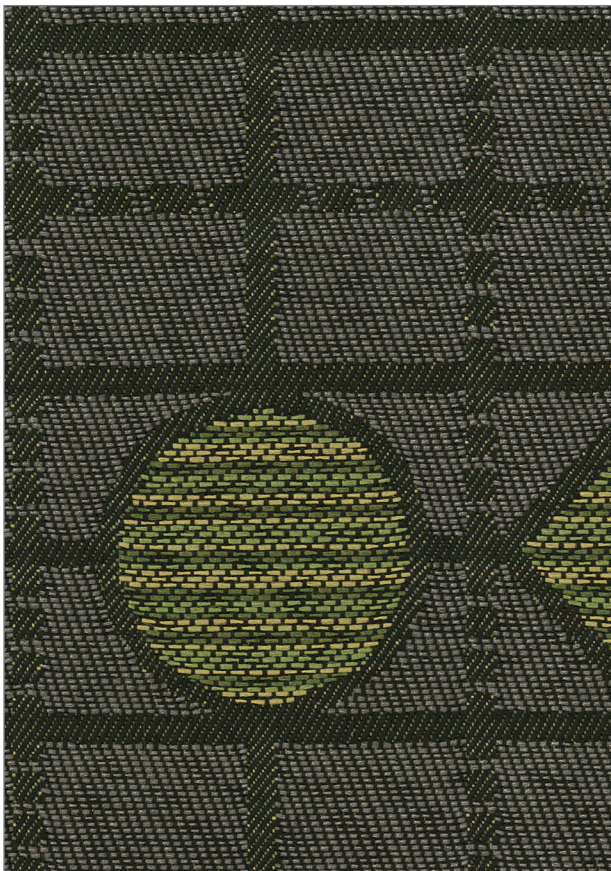

Improv - Meadow

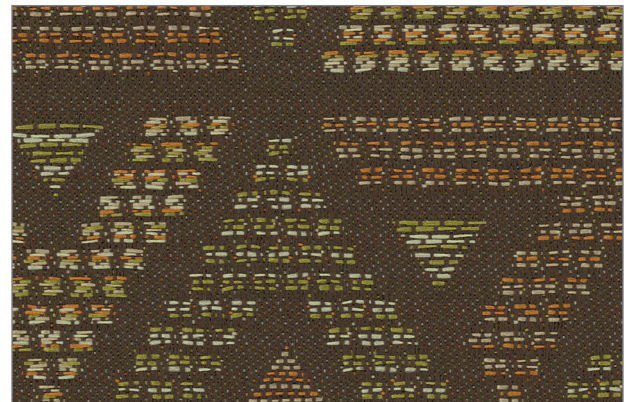

Study - Citrus




Nook - Maple



Forest - Maple




Forest - Meadow

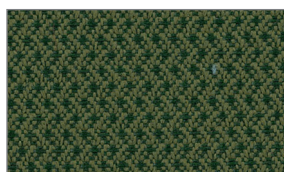

Flex - Pine




Flex - Maple

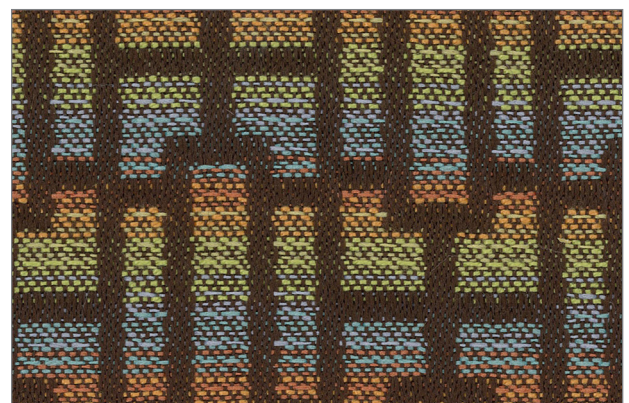

Pulse - Citrus




Pulse - Regatta

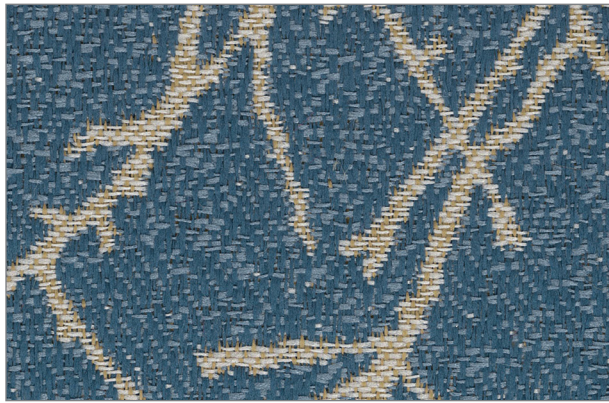


Forest - Regatta




Nook - Regatta

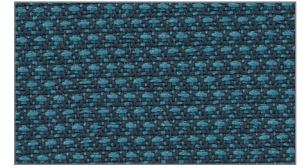

Flex - Regatta

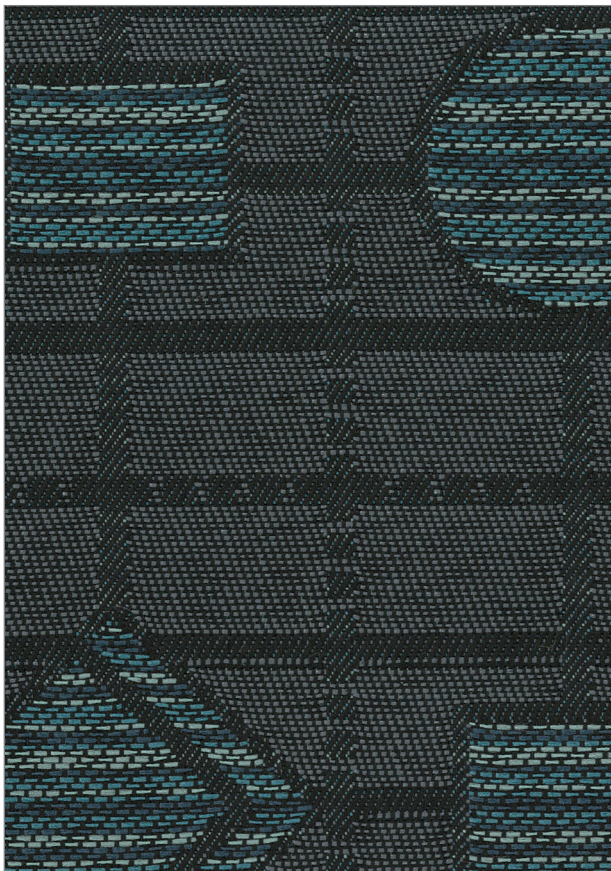

Improv - Regatta

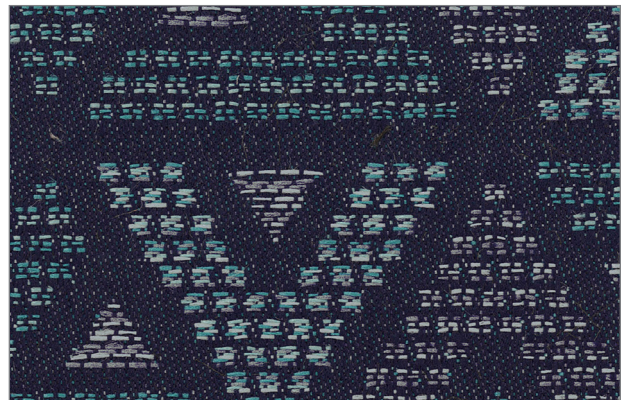


Study - Regatta




Flex - Marine Blue




Nook - Denim

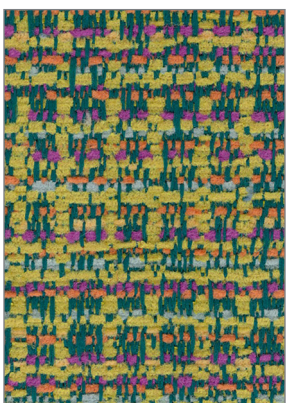

Nook - Meadow

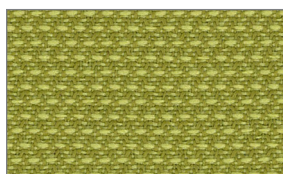

Flex - Meadow

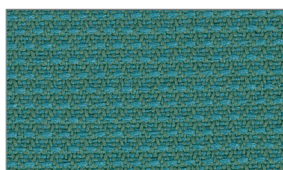


Flex - Teal




Pulse - Meadow



Study - Meadow

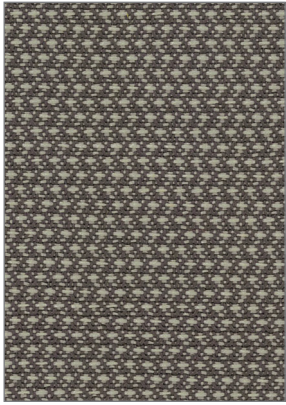


Flex - Mist

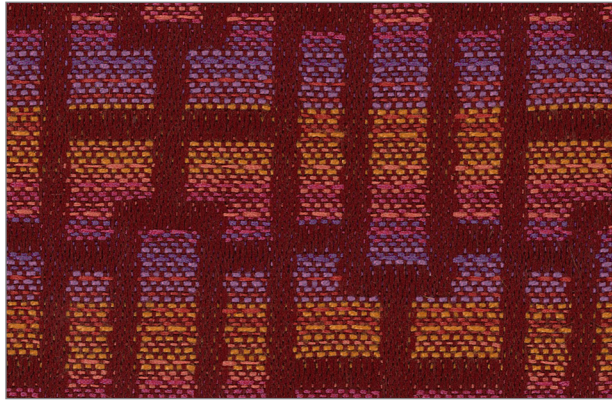


Pulse - Fruit Punch




Forest - Citrus




Flex - Citrus

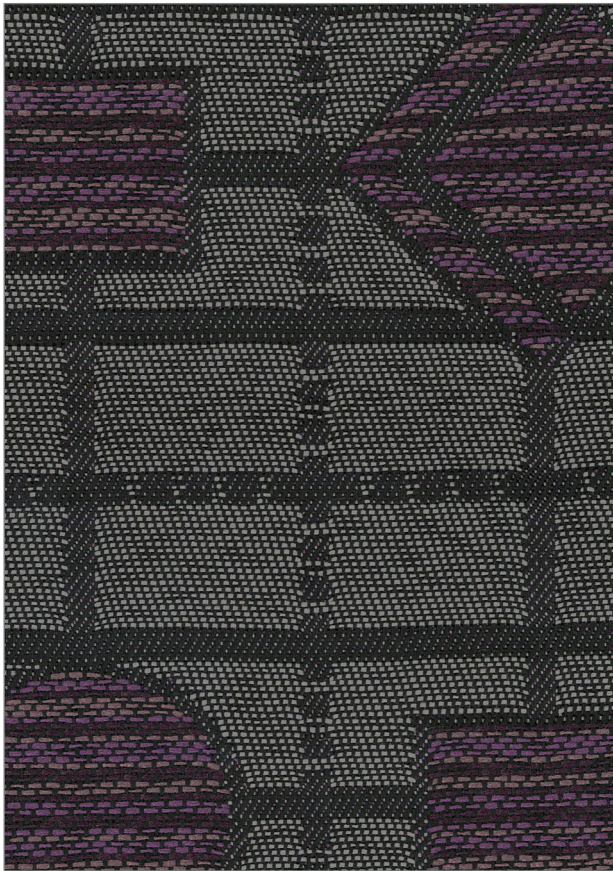

Improv - Mulberry

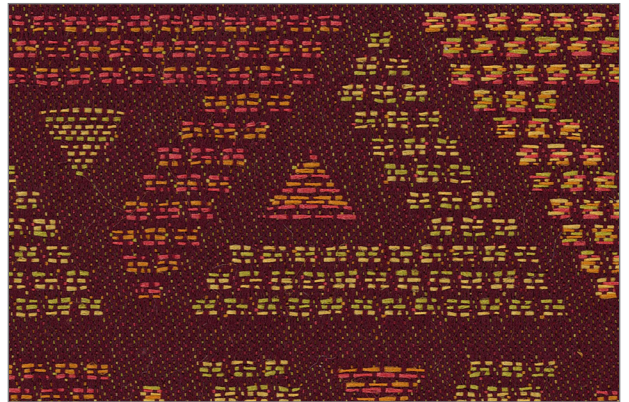


Study - Fruit Punch

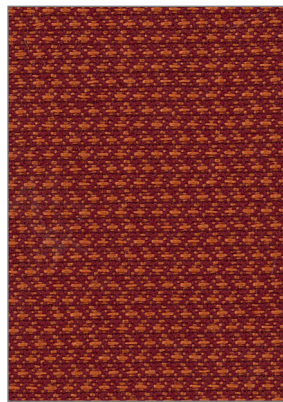


Flex - Fruit Punch



Nook - Fruit Punch

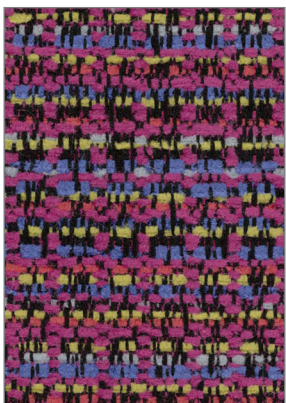

Nook - Mulberry

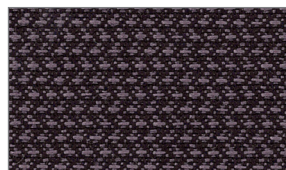

Flex - Mulberry



Flex - Smoke



Pulse - Mulberry

Technical Information

Width - Pattern	Fabric Content & Backing	Finish	Abrasion (double rubs)	Seam Slippage	Lightfastness	Approx. Repeats	Cleaning Code*
54" FLEX	100% Polyester Acrylic Backing	Soil & Stain Resistant	100,000	Warp - 92 Weft - 91	60 Hours	(None)	WS
54" FOREST	100% Polyester Acrylic Backing	Soil & Stain Resistant	75,000	Warp - 68 Weft - 76	60 Hours	13.5" H x 6.687" V	WS
54" IMPROV	100% Polyester Acrylic Backing	Soil & Stain Resistant	115,000	Warp - 78 Weft - 76	60 Hours	9.0" H x 7.375" V	WS
54" NOOK	100% Polyester Acrylic Backing	Soil & Stain Resistant	100,000	Warp - 90 Weft - 84	60 Hours	4.63" H x 1.75" V	WS
54" PULSE	100% Polyester Acrylic Backing	Soil & Stain Resistant	80,000	Warp - 83 Weft - 72	60 Hours	2.312" H x 5.0" V	WS
54" STUDY	100% Polyester Acrylic Backing	Soil & Stain Resistant	75,000	Warp - 84 Weft - 71	60 Hours	7.125" H x 7.25" V	WS



Flammability

Flammability testing determines a fabric's resistance to burning. These fabrics are Cal 117-2013 compliant.



Abrasion

The ability of a fabric to withstand damage from wear and rubbing.
Passes Heavy Duty Contract ASTM 3597 modified (No. 10 cotton duck); Wyzenbeek Method.



Colorfastness to Light

The degree to which fabric will retain its color when exposed to light.
Passes AATCC 16A-1974 or AATCC 16E-1976, Class 4 minimum at 40 hours.
Note: Class 4 minimum at 60 hours is recommended for direct sunlight exposure.



Colorfastness to Wet and Dry Crocking

The rubbing off of color from fabric onto clothing, hands or other materials and can occur under wet or dry conditions. Passes AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum.



Seam Slippage

The pulling apart of fabric at the seams.
Passes ASTM D 40325 lbs. minimum, warp and weft.

* Cleaning Code WS - For water based stains, use mild detergent foam or upholstery shampoo. For oil based stains, spot clean with a dry cleaning solvent, being sure to test area first. **We recommend using a professional cleaning service.**



Savoy

CONTRACT FURNITURE®

Savoy Contract Furniture • 300 Howard Street • Montoursville, PA 17754
Toll Free 800.233.8953 • www.savoyfurniture.com • sales@savoyfurniture.com

Savoy Contract Furniture® is a registered trademark of John Savoy and Son, Inc.